


Be Extra Smart,
Be Extra Refined
X10 Patient Monitor



X10
Patient Monitor

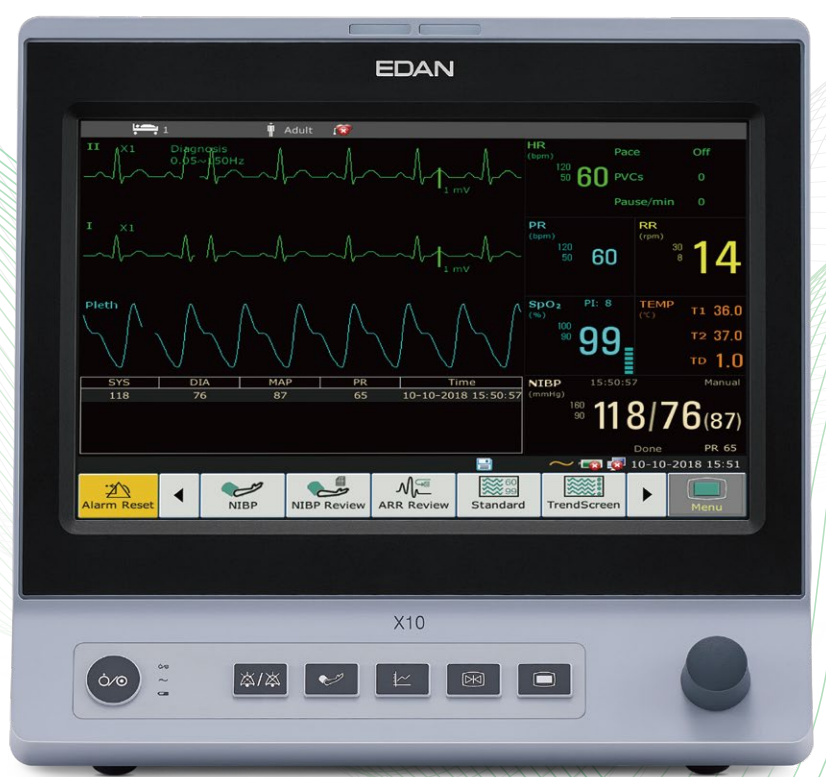


Build Your Confidence on Quality Care

Based on its expandability of monitoring parameters, and stunning ultra-slim design, the X12 fulfills your primary clinical requirements in various scenarios, including Emergency Rooms, General Wards, Rehabilitation Department, Cardiac Units, and In-hospital Transfer, covering all patient types, realizing from neonatal to adult monitoring.



10.1"




No-fan Design



Pitch Tone



Dual Alarm Lights



Shortcut Menu



Wi-Fi



USB Disk



Operating Time ≥8h



Barcode Scanner

Standard Parameters:

3/5-lead ECG, RESP, EDAN SpO₂, EDAN NIBP, 2-channel TEMP


Optional Parameters:

6/12-lead ECG, 2-channel IBP, EDAN G2 CO₂

Proprietary Algorithms & Technologies

EDAN G2 CO₂ (Sidestream)

- Superior water trap design for accurate monitoring.
- iCARB™ algorithm with intelligent CO₂ pseudo wave identification technology.
- Sampling rate as low as 50ml/min.
- Accessories for all patient types.

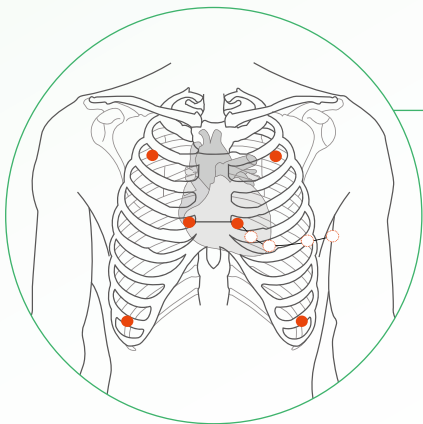

ECG

- Customizable 6-lead placement for more ECG waves.
- Automatic lead type detection.
- Industry leading iSEAP™ algorithm with auto-detection of 33 types of arrhythmias.
- SEMIP™ algorithm with 208 ECG findings over age/gender diversities.



SpO₂

- iMAT™ algorithm with outstanding motion resistance and low perfusion resistance performance.
- Reference reading of Perfusion Index (PI) from 0 to 10 according to perfusion changes.
- Simultaneous measurements of SpO₂ and NIBP of the same limb.

NIBP

- Dual dust filter design makes no blockage inside and provides accurate NIBP readings.
- Unique cleaning mode for routine maintenance.
- iCUFST™ algorithm with smart deflation technology.



A single piece of patient data contains:

